



INSTRUCTION MANUAL

TECHNICAL DATA SHEET



SALVALAVATRICE







DECLARATION OF CONFORMITY

Company:	AQUA S.p.A.
Address:	Via T. Crotti, 1 - 42018 - San Martino in Rio (RE)

Hereby declares that the products named:

• AQUA SALVALAVATRICE


Responds to the principal features of the following European Directives:

- **2014/30/CE of 26/02/2014 - Harmonization of the laws of the Member States relating to electromagnetic compatibility – EMC Directive**
- **2014/35/CE of 26/02/2014 - Harmonization of the laws of the Member States relating to the making available on the market of electrical equipment designed for use within certain voltage limits – Low Voltage Directive**
- **2011/65/UE of 08/06/2011 with subsequent update 2015/863 of 31/03/2015 – ROHS III Directives**
- **2012/19/UE of 04/07/2012 - WEEE Directives for electrical and electronic waste**

This declaration is issued under the responsibility of Aqua S.p.A.

San Martino in Rio (RE) - 08 settembre 2020

Davide Vezzani
Certification Manager - Aqua S.p.A.



AQUA S.p.A.
 Sede e stabilimento di produzione di Piacenza (Cooperativa Aquila) - Cap. Soc. € 10.000.000,00 - Sede e stabilimento di Piacenza
 S. Martino in Rio - 42018 - Reggio Emilia - ITALIA - Sede legale: Via Crotti, 1 - Sede operativa: Via Bionda, 3 - Cod. Fis. e P.IVA: 02285490290 - Pagine Gialle: 02285490290
 Tel. +39.0522.390406 - Fax. +39.0522.648100 - www.aqua.it - info@aqua.it



I
INDEX

1. KEY FEATURES 4

2. WASHING MACHINE SAVER, Salvalavatrice 3/4” 4

3. DIMENSIONS AND PACKING 5

1. KEY FEATURES

Machine point of entry

Durable quality

Price effective

Nice Design

Small & Compact

Easy to Install

2. WASHING MACHINE SAVER, Salvalavatrice 3/4"

This is a very economical lime encrustation removing system using polyphosphates. It has been designed for the washing machine or the dishwasher, and is mounted directly on the water in-take pipe. It is compact and made of highly resistant plastic, and is so easy to install that it is not necessary to call a plumber. Washing Machine Saver keeps the washing machine or dishwasher free of lime encrustation, thus reducing consumption of energy and detergent. The polyphosphates contained in the product are effective for about 4 months on the average.

<u>TECHNICAL FEATURES</u>	
Head:	PP
Sump:	Transparent SAN
O-Ring:	NBR 70 Sh
Working Pressure:	8 bar max.
Burst Pressure:	35 bar max. (290 PSI)
Working temperature:	0°C (32°F) to 50°C (122°F)
Capacity (empty) at 2 bar:	60 lt/min
Suggested flow rate:	Max 8/10 lt/min
Life test:	200.000 cycles from 0-10 bar

3. DIMENSIONS AND PACKING

A x B: 60 mm x 141 mm C x D: $\frac{3}{4}$ "F x $\frac{3}{4}$ "M


Packing weight: 8 kg

Packing size (mm):

17 x 30 x 51 cm

Packing volume:

0,026 m³

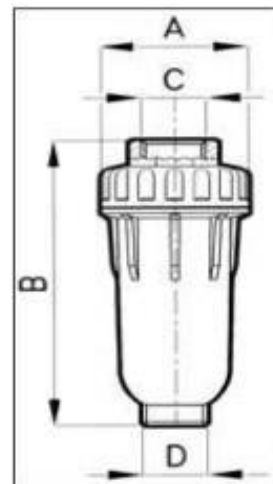



SALVALAVATRICE

